



Q1[®] High Performance Masking Tape designed for demanding applications requiring Water and UV resistance

Q1[®] High Performance Masking Tape is ideal for critical paint masking applications, even in wet conditions, assuring indoor and outdoor superior performance in automotive refinishing market.

Q1[®] High Performance Masking Tape has been specifically designed for most critical jobs in the automotive aftermarket and can withstand high temperatures up to 110°C (230°F) for as long as 30 minutes. It's also UV resistant up to three days, making it ideal for projects where UV resistance is required.

The high-quality rubber-based adhesive formula provides a class-leading secure bond on multiple surfaces preventing lifting or overspray. It also allows for better bonding to itself for improved painting process performance.

Manufactured using crepe paper, it conforms well to curved and irregular surfaces and, thanks to a specific water resistance backing treatment, offers superb resistance to moisture, water and solvent based paints, as well as withstanding the process of wet sanding.


It has a low-profile backing which leaves smooth paint edges and thanks to its translucent green colour, it ensures better masking area visibility.



Features & Benefits

Perfect for masking prior to paint-spraying operations for outstanding results.

- Special water resistance backing for waterborne paints and wet sanding applications
- Three days UV resistance
- Flexible backing delivers high conformability to curved and irregular surfaces
- Thin green translucent backing for high visibility during masking operations
- Withstands temperature up to 110°C (230°F) for as long as 30 minutes without any adhesive residue
- Better bonding to itself for improved painting process performance
- Excellent adhesion to multiple surfaces including metal, rubber, glass and plastic
- Great sharp paint lines

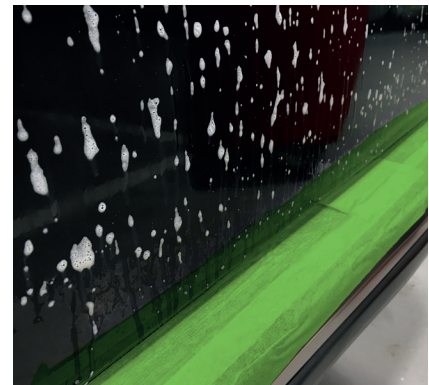

Products Reference



Part #	Size	Pcs / Case
HPG118	18mm x 50m	48 rolls/case
HPG124	24mm x 50m	36 rolls/case
HPG130	30mm x 50m	32 rolls/case
HPG136	36mm x 50m	24 rolls/case
HPG148	48mm x 50m	20 rolls/case

Technical Data		
Total thickness	130 µm	5.1 mils
MD tensile strength	42 N/cm	24 Lbs/in
MD elongation at break	8%	8%
Adhesion to steel plate	2.3 N/cm	21 oz/in
Temperature resistance	110°C (30 min.)	230°F (30 min.)

A leading European manufacturer behind Q1®

The company behind the Q1® Brand of products, is one of the leading European masking tape manufacturer. PPM Industries has been at the forefront of the industry, creating masking tape solutions for more than 25 years.

Q1® Brand has been created by the experience and knowledge of PPM team gained from providing masking products in over 50 countries. Q1® represents the perfect solution for professionals operating in the automotive and collision repair markets.

Q1® is a Brand of
PPM Industries S.p.A

Discover
more

PPM Industries S.p.A
Via G. Terzi di S. Agata, 23
24030 Brembate Sopra (BG)
Italy

