

TECHNICAL DATASHEET

PSA6101 DOUBLE SIDED FOAM PADS


Product Description:

A white double-sided PE foam tape with acrylic adhesive and white paper liner. It is suitable for use with a wide range of paper and board, plastic, metal and glass substrates. It has good ageing resistance, good plasticiser and UV resistance.

Physical Characteristics

Material Instruction		Standard	Physical Properties
ADHESIVE TYPE	Solvent Acrylic	ADHESION TO STEEL GB/T2792-2014 (dwell time 20 min)	It's damaged on the steel plate
CARRIER	PE Foam	STATIC SHEARING (HOLDING POWER) GB/T4851-2014 (20 X 24mm)	1000g, 5.76cm ² 1440 min+
THICKNESS	TAPE	1000±100µm	≤50mm
	LINER	130µm	
	TOTAL	1130 ± 100µm	
RELEASE LINER	Blank Paper	SOLVENT RESISTANCE	Good
TAPE COLOUR	White	TEMP. RESISTANCE	80° C
FOAM DENSITY	67 kg m ³		
SHELF LIFE	6 months Storage Condition: 21° C (70 F) & 50% relative humidity		

Product Construction:

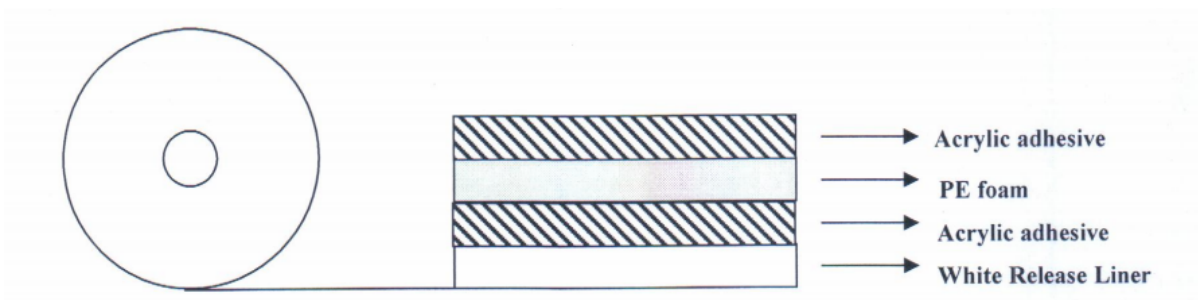

PSA SOLUTIONS LIMITED

UNIT 3 AMOS LODGE, ASHBY ROAD, ULLESTHORPE
LE17 5DN

TEL: 01162 865141 EMAIL: sales@psasolutions.uk.com

APPLICATION TECHNIQUES

1. Appropriate pressure helps develop better adhesive contact and improves bond strength
2. To obtain optimum adhesion, the bonding surface must be clean, dry and well unified. Some typical cleaning solvents are isopropyl alcohol or heptane.
3. Ideal tape application temperature is 21°C - 38°C (70°F - 100°F). It is not suggested apply the tape at temperatures below 10°C (50°F). However, once properly applied, low temperature holding is generally satisfactory.

Important Note

Information regarding the product range offered by Kingdom is based upon reports and information which we believe to be reliable although such information does not constitute a warranty or guarantee.

Because of the diversity of all the product applications the buyer should carefully consider the suitability and performance of the product for each intended use and the buyer shall be responsible for all associated risks.

The seller is not liable for damages either incidental or consequential.

All specifications are subject to change without prior notice.